
WHAT WENT WRONG?

7 DEFECTS AND THE FIX

Most paint problems are fixable

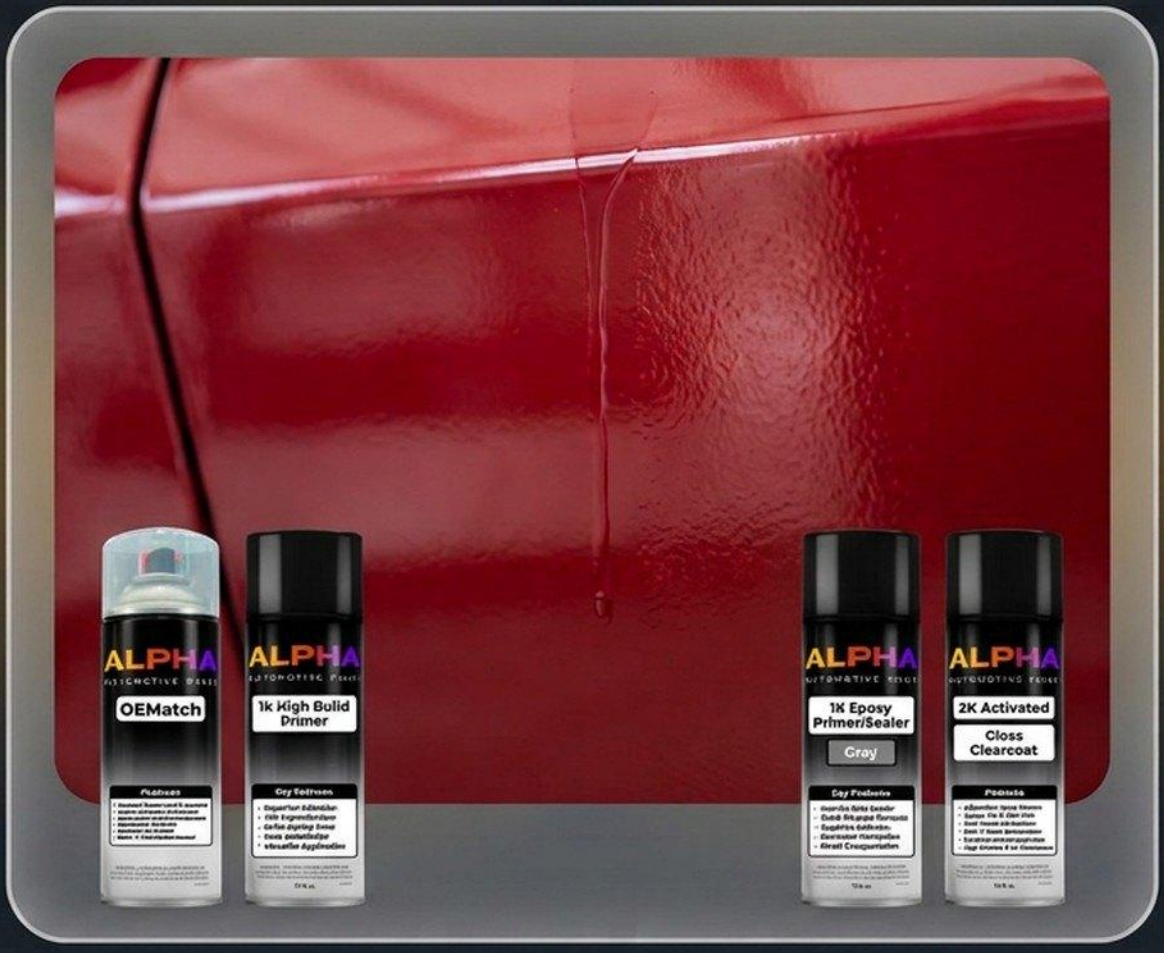

@thespraysource

ORANGE PEEL

WET SAND 1500 TO 2000, THEN POLISH

Cause: gun too far, pressure low, reducer too fast



@thespraysource

FISHEYES

SAND BACK AND REPAINT

Contamination. They cannot be buffed out



@thespraysource

SOLVENT POP

THINNER COATS, FULL FLASH TIME

Cause: clear too heavy. 8 to 10 minutes between coats



@thespraysource

RUNS AND SAGS

LET IT CURE, RAZOR, WET SAND

Never wipe a wet run. Keep the gun 6 to 8 inches away



@thespraysource

HAZY, MILKY CLEAR

SLOWER REDUCER

Humidity above 80%: do not spray



@thespraysource

PEELING OR FLAKING

STRIP, RE-PREP, PRIME

Poor prep or incompatible products. Start with Alpha primer/sealer



@thespraysource

COLOR LOOKS OFF

BLEND INTO THE NEXT PANEL

Factory paint ages. Blending helps hide the repair



@thespraysource

READ THE FULL GUIDE

THESPRAYSOURCE.COM

/pages/paint-troubleshooting



@thespraysource